

TEL: 977-015718027 977-015718014 AFTN: VNKTYOYX Email: caanais@caanepal.gov.np Website: caanepal.gov.np	NEPAL AERONAUTICAL INFORMATION MANAGEMENT DEPARTMENT CIVIL AVIATION AUTHORITY OF NEPAL SINAMANGAL, KATHMANDU	AIP SUPPLEMENT 05/26 02 April 2026
--	---	---

[WITH IMMEDIATE EFFECT]

Operational Advisory – Tribhuvan International Airport (VNKT)

A. Ongoing Construction Areas

Construction is in progress at the following locations with respect to the runway. Pilots shall exercise caution during landing, take-off, and taxiing.

- a) **North-East Area:** Hangar area development
- b) **North-West Area:** New remote apron and associated taxiway system
- c) **South-West Area:** Parallel taxiway extension to connect Runway - 02

B. Temporary Aircraft Parking Arrangements

a) **Domestic Parking Areas:**

- 1. Areas D1, D2 & D3 are indicated in the attached drawing
- 2. D1: Old (Existing) Domestic Apron
- 3. D2 & D3: New Apron (temporary parking)

b) **Operational Notes for D2 & D3:**

- 1. Parking areas demarcated with water-filled barricades
- 2. Temporary lighting available for night operations
- 3. **No apron markings** – crews to exercise caution during maneuvering; floodlight masts (not in operation) are present in the area
- 4. Domestic airline operators are required to deploy a sufficient number of experienced marshallsers.

Note:

- This AIP supplement supersedes AIP Supplements 4/25, 16/25 and 4/26 & NOTAM A0036/26
- This AIP supplement will be valid until superseded by another AIP supplement (Ref pages: AIP Nepal VNKT AD)

C. Runway and Taxiway Restrictions

Item	Details
a) Runway Turn Pad (Runway 02, Southern End)	Reduced by 11 m until 15 June 2026 . Max steering angle: 40 degrees . Max taxi speed: 10 knots .
b) Parallel Taxiway Segment Closure	Taxiway E and part of Taxiway F (between Taxiway D and E) closed for intersection improvement. Period: 01 December 2025 – 30 April 2026 .
c) Temporary Link Taxiway	Taxiway G available with markings and retroreflective blue edge markers.

D. Construction Areas Relative to Movement Area


Construction activities outside the Obstacle Free Zone (OFZ) and Movement Area continue **24 hours a day**.

- a) **East Side (North of ARFF Station):** Hangar apron and taxiway work ongoing beyond **75 m** from runway centerline towards.
- b) **West Side (Runway 02 End):** Parallel taxiway extension works ongoing beyond **75 m** from runway centerline, south of Taxiway **D**.
- c) **West Side (North of Old Domestic Apron):** New remote apron construction works ongoing beyond **43.5 m** from new parallel Taxiway **P** centerline.

E. Additional Notes

- a) Remaining works to match the level of Taxiway **P**, **U**, **F** and the runway are scheduled for completion by June 2026.
- b) Pilots are advised to remain vigilant for unmarked areas, construction equipment, and changed taxi routes.

Civil Aviation Authority of Nepal
 Tribhuvan International Airport, Kathmandu (VNKT)
Graphics showing Boundaries of construction works

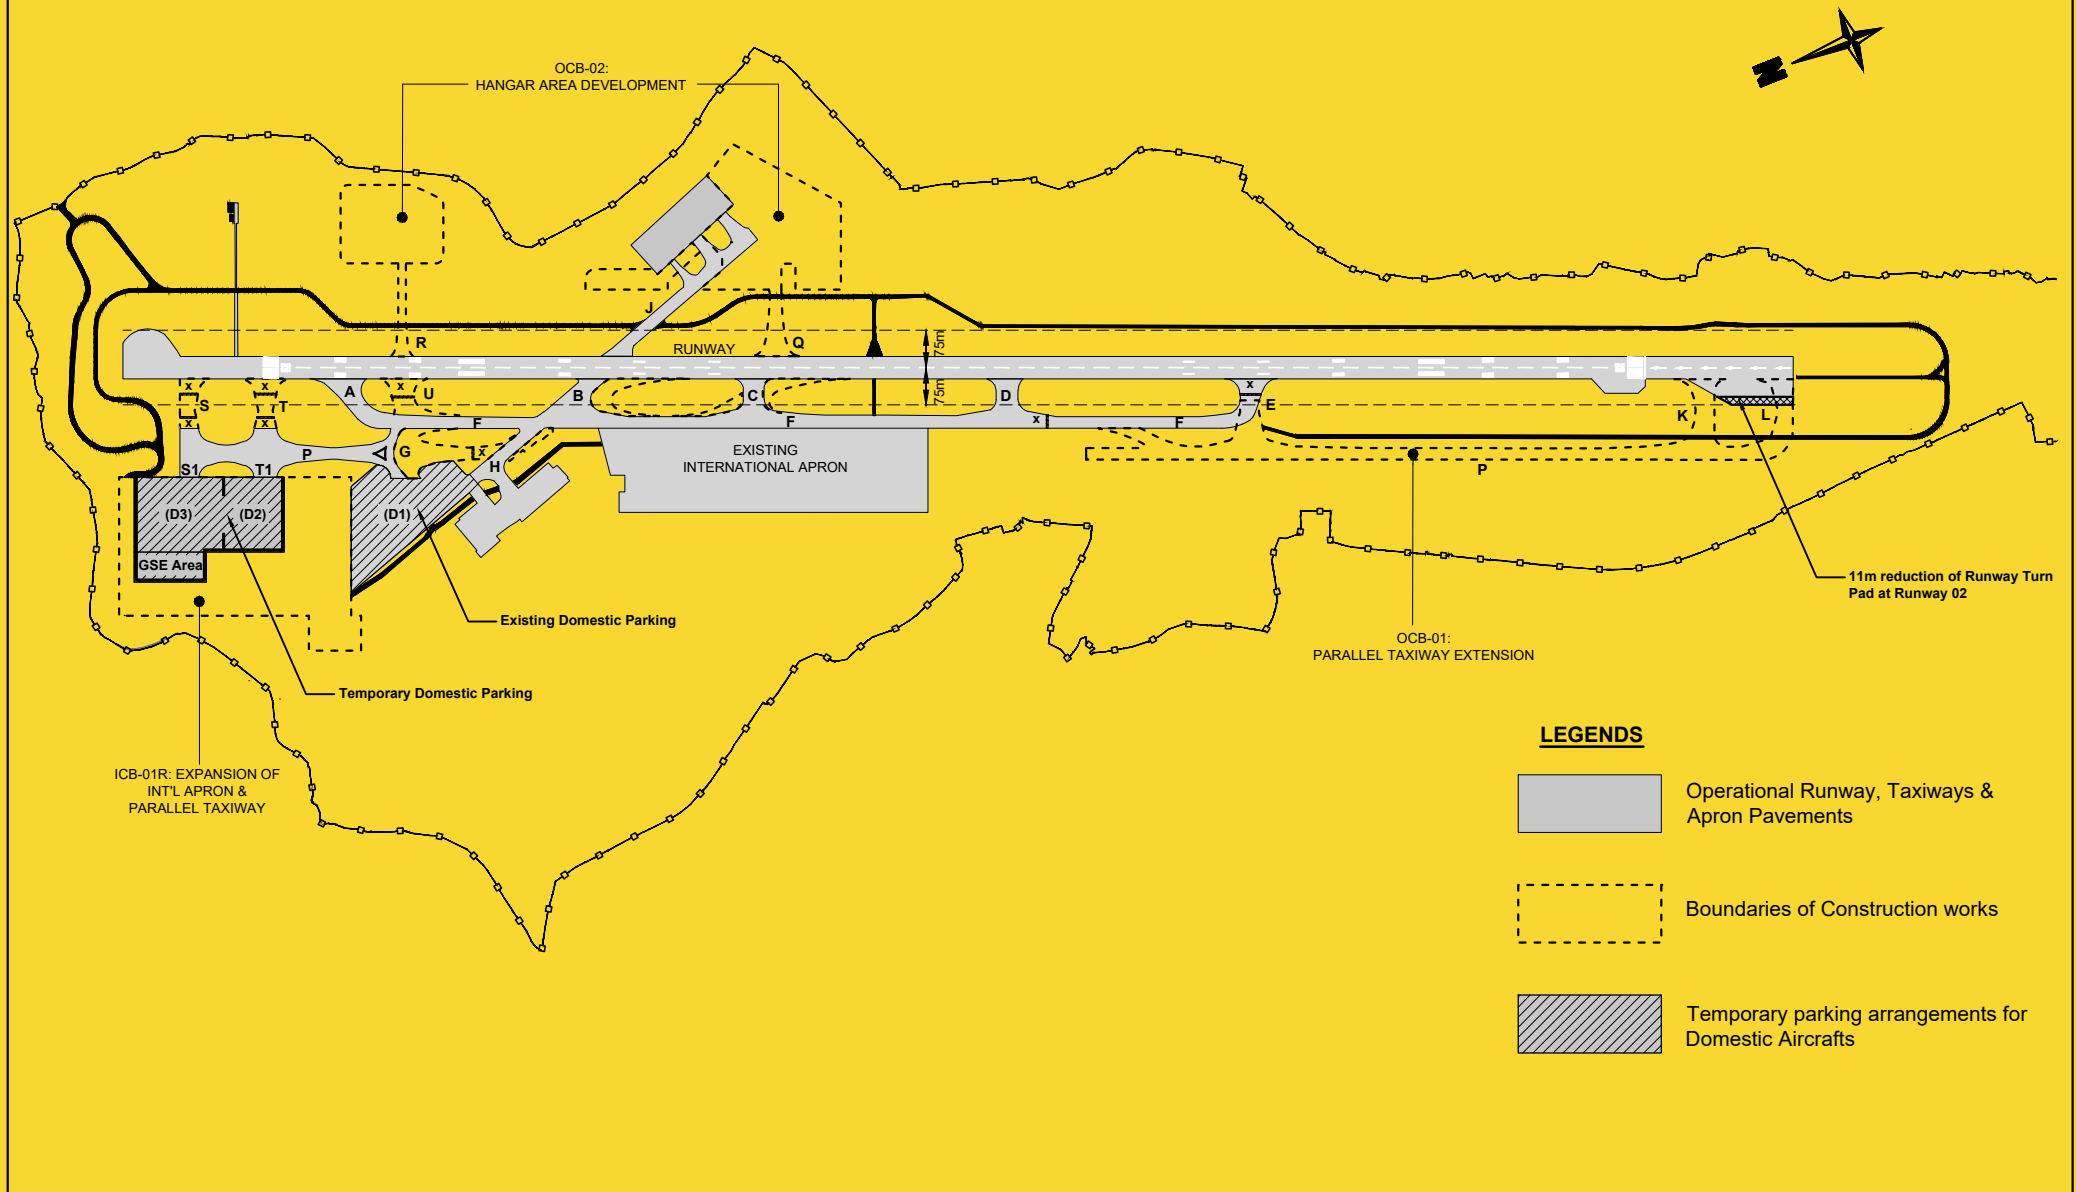

- LEGENDS**
- Operational Runway, Taxiways & Apron Pavements
 - Boundaries of Construction works
 - Temporary parking arrangements for Domestic Aircrafts